

# **K913** SC, R2P 8p, open

# Single channel connection cable between an HV analog measurement module and four sensors with measurement voltages up to 1,000 V



### **Description**

Single channel connection cable between an HV analog measurement module and four sensors (without sensor supply). Shielding per channel for suppressing interferences.

Each cable is isolation tested according to EN 61010-1:2010 before delivery.

#### **Technical data**

Diameter	4 × 4.6 mm	
Strip lengths		
Sheath	22 mm	
Open cable end	2 mm (tinned)	
Operating temperature range	-40 °C to +125 °C, pressure resistance until about +80 °C	

#### **Connectors**

A Plug LEMO Redel 2P 8-pole code DB 4 × open cable end, 2 wires + shield each

# **Variants**

Article number	Cable number	Length
ART1423706	K913-0200	2 m

#### NOTE!



Because cables are often exposed to chafing on bodywork parts, this cable incorporates a visual safety concept.


- ▶ The **orange outer sheath** provides high mechanical and electrical safety.
- ▶ If the underlying **blue intermediate sheath** becomes visible, this indicates that the cable is no longer operationally safe.

#### **WARNING!**



The open cable end is not protected against accidental touch. Touching the open cable end or a damaged cable sheath could result in life-threatening electric shocks.

To not touch cable end or damaged cable.

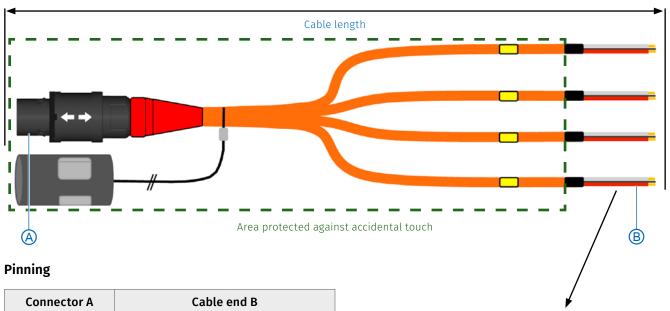

Connector A	Cable end B	
Pin	Signal	Wire Color
1	K1 +	white
n.c.*	K1 Shield	_
2	K1 -	brown
3	K2 +	white
n.c.*	K2 Shield	_
4	K2 -	brown
5	K3 +	white
n.c.*	K3 <sub>Shield</sub>	_
6	К3 -	brown
7	K4 +	white
n.c.*	K4 Shield	_
8	K4 -	brown

www.tuv-sud.com/ms-cert

## CSM GmbH

Computer-Systeme-Messtechnik

Raiffeisenstr. 36, 70794 Filderstadt, Germany \$\dagger +49711-779640 \overline{\textit{\overline{N}}} info@csm.de

www.csm.de All trademarks mentioned are property of their respective owners. This document is subject to change without notice.

22 mm

CSM GmbH Germany is certified.

<sup>\*</sup> not connected