


LEM Sensor Package

Type LF 210-S | LF 310-S | LF 510-S | LF 1010-S

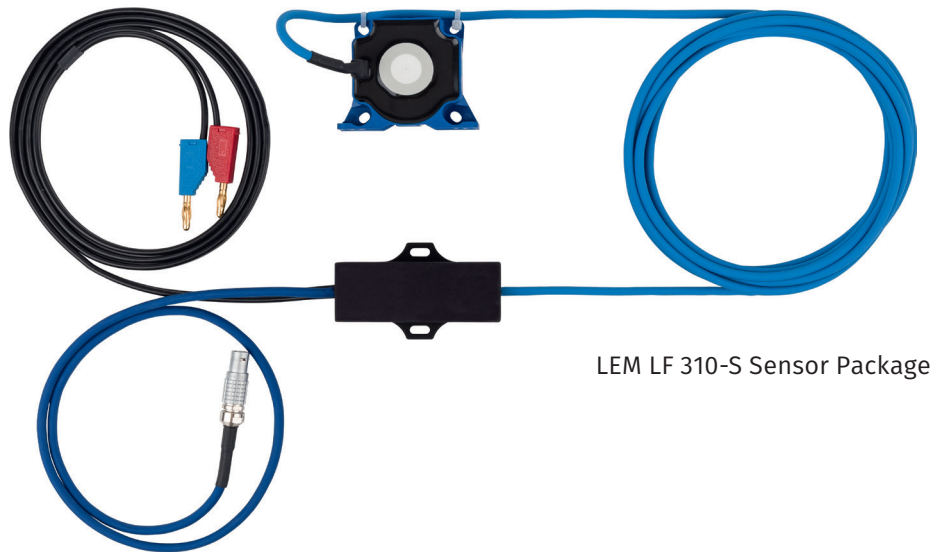

LEM LF 310-S Sensor Package

Product description

The CSM LEM Sensor Packages combined with a measurement module such as an AD4 IG1000 allow very precise measurements of electrical currents up to $\pm 1,250\text{ A}$ (max. $800\text{ A}_{\text{rms}}$ continuously) with signal frequencies up to 200 kHz (LEM LF 1010-S).

An AD4 IG1000 MiniModule can measure up to four electrical currents synchronously. Alternatively, up to four voltages can be measured synchronously. It is therefore also possible to measure electrical power.

The applied current transducer ensures galvanic isolation between test object and measurement system and is thus suitable for high-voltage applications.

Shipping content


- ▶ LEM Sensor Package
 - ▶ Sensor LEM LF 210-S/SP3 | LEM LF 310-S | LEM LF 510-S | LEM LF 1010-S
 - ▶ Signal conditioning
 - ▶ Cabling (ready to be connected)



Key features

- ▶ Precise measurements on electrical components in vehicles for the optimization of power and fuel consumption
- ▶ Ready-to-use solution for current measurements up to $\pm 1,250\text{ A}$ with sensor LEM LF 1010-S
- ▶ TEDS support according to IEEE 1451.4
- ▶ High accuracy and frequency bandwidth (200 kHz) even at $\pm 1,250\text{ A}$ measurement current (LEM LF 1010-S)
- ▶ Fast and synchronous ($< 1\mu\text{s}$) current measurements (e.g. of all three phases)
- ▶ Possible use in 48 V on-board supply systems and high-voltage environments

Technical data

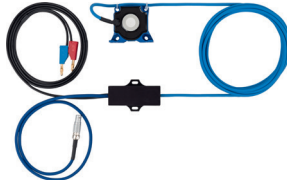
Type designation	LEM LF 210-S/SP3 Sensor Package	LEM LF 310-S Sensor Package	LEM LF 510-S Sensor Package	LEM LF 1010-S Sensor Package
Technical data valid as of revision	B002			
	<div></div> <div>image similar</div>			
Notice	technical data of LEM sensor according to manufacturer specification:			
	LEM LF 210-S	LEM LF 310-S	LEM LF 510-S	LEM LF 1010-S
Nominal current (for continuous operation)	up to 100 A _{rms} See section "Product variants"	max. 300 A _{rms}	max. 500 A _{rms}	max. 800 A _{rms}
Measurement range	up to ±200 A See section "Product variants"	±500 A	±800 A	±1,250 A
Threshold frequency	100 kHz		200 kHz	
Measurement uncertainty				
Internal shunt	max. ±0.02 % of measured value, 5 ppm/K			
LEM sensor	details see LEM Specification			
TEDS support	according to IEEE 1451.4			
Power supply	externally powered via U _{Bat} of the vehicle with active reverse polarity protection			
Minimum	9 V DC			
Maximum	36 V DC			
Power consumption				
Minimum	1.5 W		1.8 W	
	at 0 A ("idle")			
Maximum	5.1 W	6.0 W	4.5 W	6.0 W
Output voltage	±5 V at measurement range			
Recommended measurement range	±5 V (AD4 IG1000 MiniModule)			
Housing	signal conditioning only See section "Connection scheme"			
Protection class	IP67 (potted)			
Dimensions (w × h × d)	approx. 50 × 25 × 85 mm			
Connectors				
Power supply	banana plugs			
Output (to module)	LEMO 1B, 8-pole, code G			
Operating and storage conditions	signal conditioning only See section "Connection scheme"			
Operating temperature range	-40 °C to +85 °C			

Type designation	LEM LF 210-S/SP3 Sensor Package	LEM LF 310-S Sensor Package	LEM LF 510-S Sensor Package	LEM LF 1010-S Sensor Package
Cable lengths				
To power supply	1.5 m			
To LEM sensor	3.0 m			
To measurement module	0.75 m			

Product variants (LEM LF 210-S/SP3 Sensor Package)

Name suffix	_200	_100	_50	_20	_10	_5
Nominal current (for continuous operation)	max. 100 A _{rms}	max. 100 A	max. 50 A	max. 20 A	max. 10 A	max. 5 A
Measurement range	±200 A	±100 A	±50 A	±20 A	±10 A	±5 A

Connection scheme (LEM LF 310-S Sensor Package)

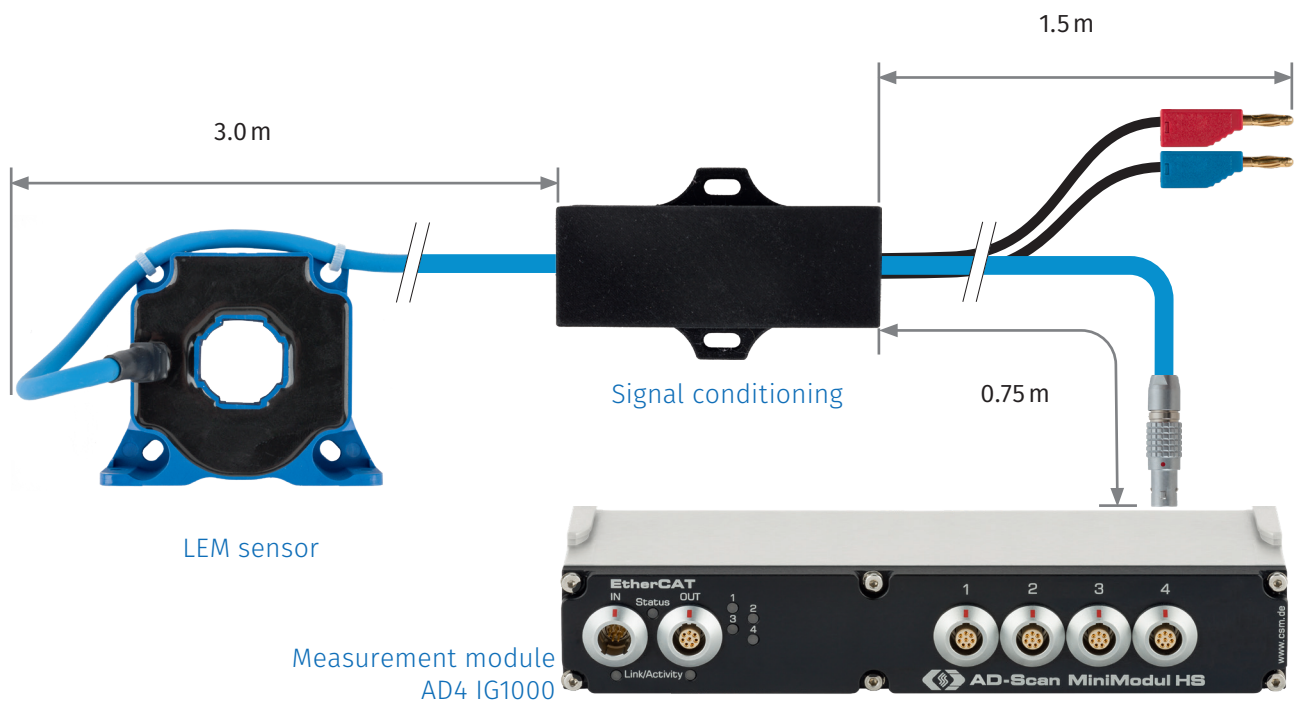



CSM GmbH Headquarters (Germany)

Raiffeisenstraße 36 • 70794 Filderstadt
☎ +49 711-77 96 40 ✉ sales@csm.de

CSM Office Southern Europe (France, Italy)

ArchParc • Immeuble ABC 1 – Entrée A
60, rue Douglas Engelbart • 74160 Archamps, France
☎ +33 4 50 95 86 44 ✉ info@csm-produits.fr

CSM Products, Inc. USA (USA, Canada, Mexico)

1920 Opdyke Court, Suite 200 • Auburn Hills, MI 48326
☎ +1 248 836-4995 ✉ sales@csmproductsinc.com

CSM (RoW)

Vector Informatik (China, Japan, Korea, India, Great Britain)

ECM AB (Sweden)

DATRON-TECHNOLOGY (Slovakia, Czech Republic)

Our partners guarantee you worldwide availability.

Feel free to contact us.

CSM GmbH Germany is certified.



All trademarks mentioned are property of their respective owners.

Specifications are subject to change without notice.

CANopen® and CiA® are registered community trademarks of CAN in Automation e.V.

EtherCAT® is registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.