

K124 Cable Datasheet

SC, L1B 2p, open

Signal cable for CSM Out module, open cable end

Description

CSM signal cables use a robust line and are characterized by a high interference resistance.

Temperature


The specified temperature range of the main cable excluding connectors is -40 °C to 80 °C. The specified temperature range for connectors may vary depending on the type (e.g. LEMO B connector: -55 °C to 250 °C; D-Sub: -55 °C to 105 °C; Banana: -40 °C to 80 °C; LEMO Redel: -50 °C to 150 °C).

Bending Radius

8 × Diameter

Connectors


A LEMO 1B 2-pole Code: A male
B open



Frontal view connector


Variants

Item No.	Cable Name	Length
ART0201187	K124-0200	2 m
	l1: 0.2 m	
ART0201190	K124-0400	4 m
	l1: 0.2 m	
ART0201188	K124-0500	5 m
	l1: 0.2 m	
ART0201189	K124-1000	10 m
	l1: 0.2 m	

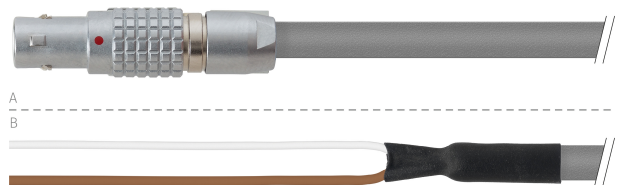

Picture similar to actual product

Overview

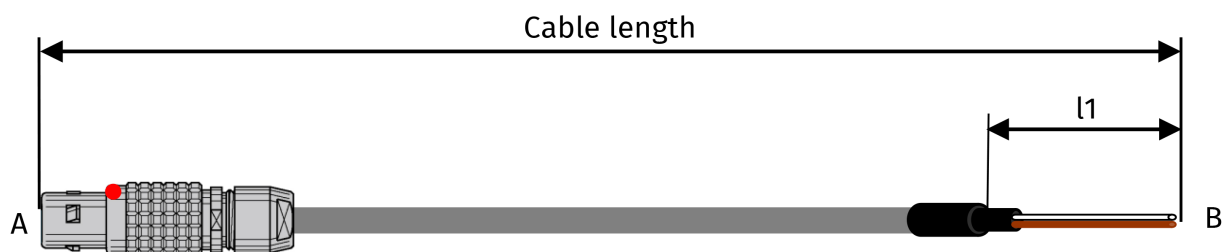

Pinning

Con. A Pin	Cable	
	Signal	Wire Color
1	VOUT+	white
2	VOUT-	brown
Housing	Cable shield	-



CSM GmbH Headquarters (Germany)

Raiffeisenstraße 36 • 70794 Filderstadt

☎ +49 711-77 96 40 ✉ sales@csm.de

CSM Office Southern Europe (France, Italy)

Site d'Archamps

60, rue Douglas Engelbart • Immeuble ABC 1, Entrée A – 1er étage

74160 Archamps, France

☎ +33 450-95 86 44 ✉ info@csm-produits.fr

CSM Products, Inc. USA (USA, Canada, Mexico)

1920 Opdyke Court, Suite 200 • Auburn Hills, MI 48326

☎ +1 248 836-4995 ✉ sales@csmproductsinc.com

CSM (RoW)

Vector Informatik (China, Japan, Korea, India, Great Britain)

ECM AB (Sweden)

DATRON-TECHNOLOGY (Slovakia, Czech Republic)

Our partners guarantee you worldwide availability.

Feel free to contact us.

CSM GmbH Germany is certified.



All trademarks mentioned are property of their respective owners.

Specifications are subject to change without notice.

CANopen® and CiA® are registered community trademarks of CAN in Automation e.V.

EtherCAT® is registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany..