

# K204 Cable Datasheet

## SC, L0B 7p, open

Signal cable for digital inputs and outputs of the UniCAN 2 and UniCAN 3

### Description


Signal cables are especially manufactured for CSM. They use a robust line and are characterized by a high interference resistance and a good signal quality. The cable is flexible and chemical resistant, including fuel and oil.

### Temperature

The specified temperature range of the main cable excluding connectors is -40 °C to 130 °C. The specified temperature range for connectors may vary depending on the type (e.g. LEMO B connector: -55 °C to 250 °C; D-Sub: -55 °C to 105 °C; Banana: -40 °C to 80 °C; LEMO Redel: -50 °C to 150 °C).


### Connectors

**A** LEMO 0B 7-pole Code: A male  
**B** open




Frontal view connector

### Overview

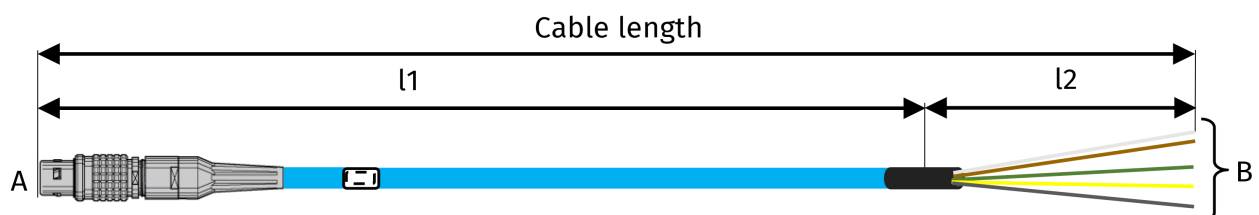

### Variants

Item No.	Cable Name	Length
ART0650054	K204-0120	1.2 m
	l1: 1 m	l2: 0.2 m

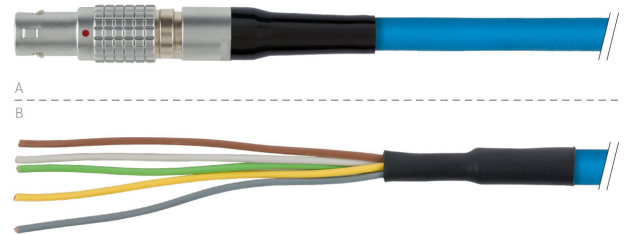

Picture similar to actual product

## Pinning

Con. A Pin	UniCAN 2 Signal	UniCAN 3 Signal	Cable Wire Color
1	DIN1	DIN1 / DOUT1	white
2	DIN2	DIN2 / DOUT2	brown
3	DIN3 / DOUT2	DIN3 / DOUT3	yellow
4	DIN4 / DOUT1	DIN4 / DOUT4	grey
5	Power GND	Power GND	green
Housing	Cable shield	Cable shield	-
6, 7 n.c.	-	-	-



**CSM GmbH Headquarters** (Germany)

Raiffeisenstraße 36 • 70794 Filderstadt

☎ +49 711-77 96 40 ✉ [sales@csm.de](mailto:sales@csm.de)

**CSM Office Southern Europe** (France, Italy)

Site d'Archamps

60, rue Douglas Engelbart • Immeuble ABC 1, Entrée A – 1er étage

74160 Archamps, France

☎ +33 450-95 86 44 ✉ [info@csm-produits.fr](mailto:info@csm-produits.fr)

**CSM Products, Inc. USA** (USA, Canada, Mexico)

1920 Opdyke Court, Suite 200 • Auburn Hills, MI 48326

☎ +1 248 836-4995 ✉ [sales@csmproductsinc.com](mailto:sales@csmproductsinc.com)

**CSM** (RoW)

**Vector Informatik** (China, Japan, Korea, India, Great Britain)

ECM AB (Sweden)

DATRON-TECHNOLOGY (Slovakia, Czech Republic)

Our partners guarantee you worldwide availability.

Feel free to contact us.

CSM GmbH Germany is certified.



All trademarks mentioned are property of their respective owners.

Specifications are subject to change without notice.

CANopen® and CiA® are registered community trademarks of CAN in Automation e.V.

EtherCAT® is registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany..