

K212 Cable Datasheet

PC, LOB 7p, open

Power supply cable for UniCAN 3, including Key-On (K15 ignition)

Description

System cables are especially manufactured for CSM. They are designed for high interference resistance and a very low internal resistance of the supply lines.

Temperature


The specified temperature range of the main cable excluding connectors is -30 °C to 150 °C. The specified temperature range for connectors may vary depending on the type (e.g. LEMO B connector: -55 °C to 250 °C; D-Sub: -55 °C to 105 °C; Banana: -40 °C to 80 °C; LEMO Redel: -50 °C to 150 °C).

Bending Radius

5 × Diameter

Connectors

A LEMO 0B 7-pole Code: A male **B** open



Frontal view connector


Variants

Item No.	Cable Name		Length
ART1440200	K212-0100		1 m
	l1: 0.8 m	l2: 0.2 m	



Picture similar to actual product

Overview

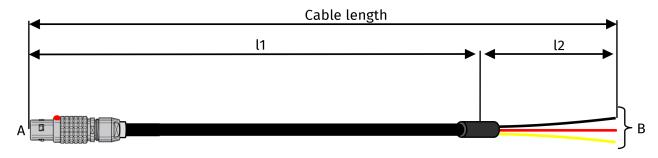

Pinning

Con. A	Cable	
Pin	Signal	Wire Color
1	K30 (power)	red
2	K15 (ignition)	yellow
7	K31 (ground)	black
Housing	Cable shield	-
3, 4, 5, 6 n.c.	-	-



CSM GmbH Headquarters (Germany)

Raiffeisenstraße 36 · 70794 Filderstadt \$\dagger +49 711-77 96 40 \$\overline{\Sigma}\$ sales@csm.de

CSM Office Southern Europe (France, Italy)

Site d'Archamps
60, rue Douglas Engelbart • Immeuble ABC 1, Entrée A – 1er étage
74160 Archamps, France
\$\display +33 450-95 86 44 \omega info@csm-produits.fr

CSM Products, Inc. USA (USA, Canada, Mexico)

CSM (RoW)

Vector Informatik (China, Japan, Korea, India, Great Britain)
ECM AB (Sweden)
DATRON-TECHNOLOGY (Slovakia, Czech Republic)

Our partners guarantee you worldwide availability. Feel free to contact us.

CSM GmbH Germany is certified.



All trademarks mentioned are property of their respective owners.

Specifications are subject to change without notice.

CANopen® and CIA® are registered community trademarks of CAN in Automation e.V.

EtherCAT® is registered trademark and patented technology, licensed by Beckhoff

Automation GmbH, Germany.