

K630 Cable Datasheet

SC, L1B 8p, open

Signal cable between CSM measurement module and sensor for measurement signal, open cable end

Description

CSM signal cables use a robust line and are characterized by a high interference resistance.

Temperature


The specified temperature range of the main cable excluding connectors is -40 °C to 150 °C. The specified temperature range for connectors may vary depending on the type (e.g. LEMO B connector: -55 °C to 250 °C; D-Sub: -55 °C to 105 °C; Banana: -40 °C to 80 °C; LEMO Redel: -50 °C to 150 °C).

Bending Radius

5 × Diameter


Connectors

A LEMO 1B 8-pole Code: G male
B open




Frontal view connector

Overview

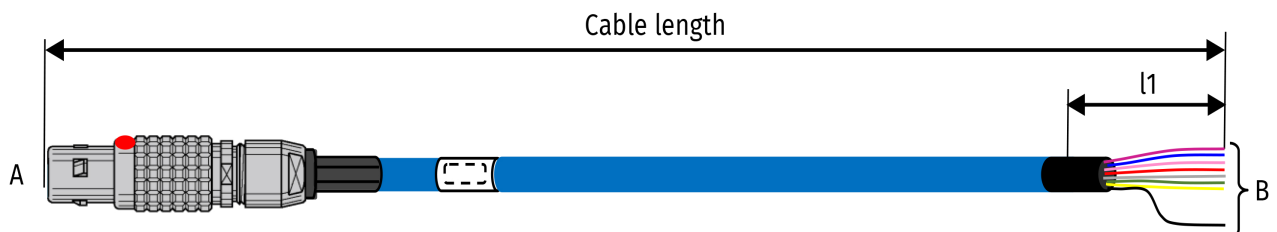

Variants

Item No.	Cable Name	Length
ART1420103	K630-0200	2 m
	l1: 0.05 m	
ART1420104	K630-0500	5 m
	l1: 0.05 m	
ART1420116	K630-1000	10 m
	l1: 0.05 m	

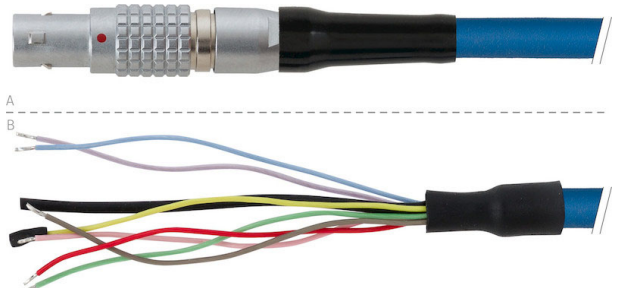

Picture similar to actual product

Pinning

Con. A Pin	ADMM HS Signal	STGMM Signal	ADMM ECAT Signal	Cable Wire Color
1	VIN-	VIN-	VIN-	purple
2	VIN+	VIN+	VIN+	blue
3	VOUT_GND	VOUT-	VOUT0	pink
4	VOUT+	VOUT+	VOUT+	red
5	-	VSENS-	VOUT-	grey
6	-	VSENS+	-	green
7	Channel shield	Channel shield	-	black (Drain wire)
8	Data *)	Data *)	-	yellow
Housing	Cable shield	Cable shield	Cable shield	-

*) Only for measurement modules with TEDS support



CSM GmbH Headquarters (Germany)

Raiffeisenstraße 36 • 70794 Filderstadt

☎ +49 711-77 96 40 ✉ sales@csm.de

CSM Office Southern Europe (France, Italy)

Site d'Archamps

60, rue Douglas Engelbart • Immeuble ABC 1, Entrée A – 1er étage

74160 Archamps, France

☎ +33 450-95 86 44 ✉ info@csm-produits.fr

CSM Products, Inc. USA (USA, Canada, Mexico)

1920 Opdyke Court, Suite 200 • Auburn Hills, MI 48326

☎ +1 248 836-4995 ✉ sales@csmproductsinc.com

CSM (RoW)

Vector Informatik (China, Japan, Korea, India, Great Britain)

ECM AB (Sweden)

DATRON-TECHNOLOGY (Slovakia, Czech Republic)

Our partners guarantee you worldwide availability.

Feel free to contact us.

CSM GmbH Germany is certified.



All trademarks mentioned are property of their respective owners.

Specifications are subject to change without notice.

CANopen® and CiA® are registered community trademarks of CAN in Automation e.V.

EtherCAT® is registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany..